



Semiconductor Switch HLS8-6G/UHI-TTL

MTS-No.: 26581

Description

The Semiconductor Switches of this series are designed to work between 100 MHz and 6000 MHz. They cover for example GSM, DECT, UMTS, Bluetooth, WiMAX, Wi-Fi (2.4G / 5G) and all LTE frequency bands.

These units are ultra-high isolation absorptive RF switches. They can easily be controlled by TTL interface.



Technical data:

1 RF-specifications:

1.1	Switch type	HLS8, 8-way absorptive		
1.2	Impedance	50 Ω		
1.3	Input power @ common port	32 dBm max.		
	@ output ports	26 dBm max. (terminated)		
1.4	Frequency range	100 - 6000 MHz		
1.5	Switching time	<10 μs typ.		
1.6	VSWR in / out @ 300 - 3000 MHz	min.	typ.	max.
			1.25	1.6
	@ 100 - 6000 MHz		1.35	2.0
	VSWR out terminated		1.2	1.6
1.7	Insertion loss @ 100 MHz		2.6 dB	3.0 dB
	@ 3000 MHz		4.5 dB	5.0 dB
	@ 6000 MHz		5.8 dB	6.5 dB
	IL derating / 200 MHz		0.11 dB	0.14 dB
1.9	Isolation @ RFC/RFX-RFX			
	@ 100 - 2000 MHz	130 dB	150 dB	
	@ 2000 - 4000 MHz	120 dB	140 dB	
	@ 4000 - 6000 MHz	100 dB	120 dB	

2 Connections:

2.1	RF-in- and outputs	9x SMA female
2.2	Control connectors	2x 12 pole male (parallel), type SMC Erni

3 General specifications:

3.1	Internal voltage (TTL)	5 VDC ±5 %
3.2	Power consumption	20 mW max.
3.3	Control interface	3 bit for data (a1, a2, a3) + 3 bit for address (b1, b2, b3) + 1 bit for enable (b4) + 1 bit for blocking (a4), TTL
	Operating temperature	-40 °C - +85 °C
	Storage temperature	-55 °C - +150 °C
	Reference temperature of specifications	+25 °C
3.7	Dimensions (without connections)	105 mm x 115 mm x 12.4 mm (LxWxH)
3.8	Case style	Milled aluminium enclosure
3.9	Colour	SurTec650 (Chrome alloy)
3.10	Weight	330 grams

4 Delivered parts:


HLS8-6G/UHI-TTL
Datasheet

5 Comments:

Warranty	12 months
RoHS-compliant	Yes

6 Recommended accessories:

RF-cables
Controller card for HLS8

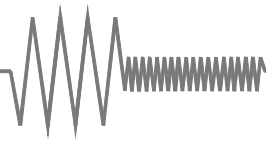

Semiconductor Switch HLS8-6G/UHI-TTL

MTS-No.: 26581

Typical measurements:

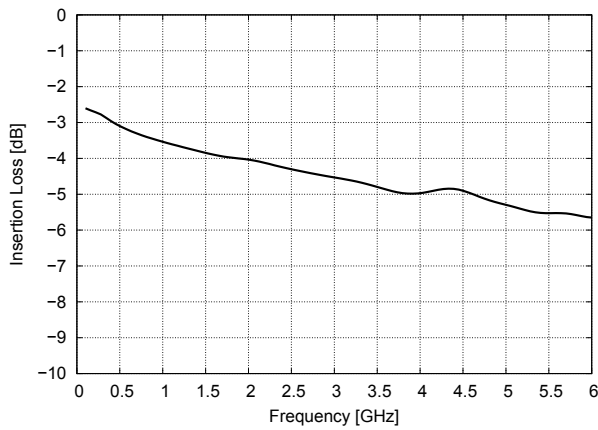


Fig. 1: Input port to output port insertion loss

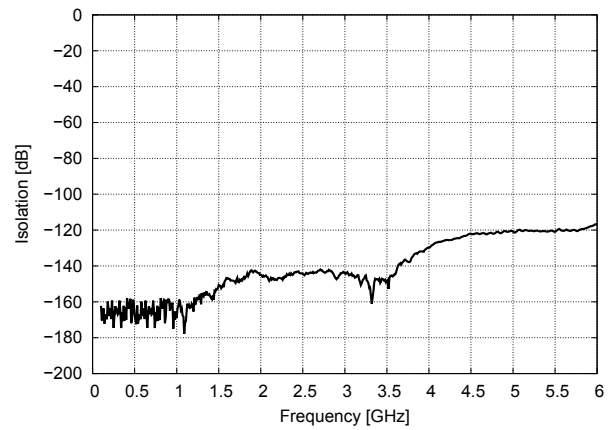


Fig. 2: Isolation between in- and output ports (RFC-RFX)

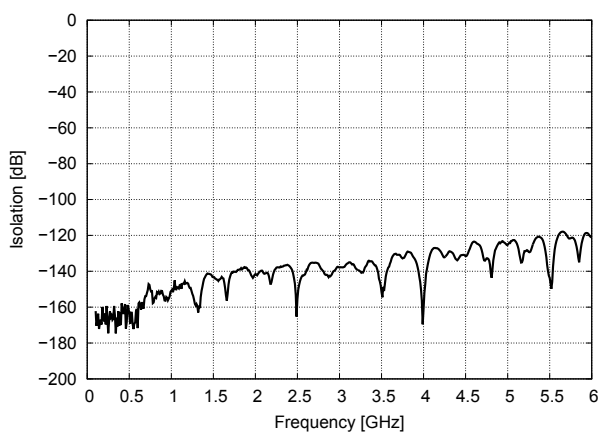


Fig. 3: Isolation between output ports (RFX-RFX)

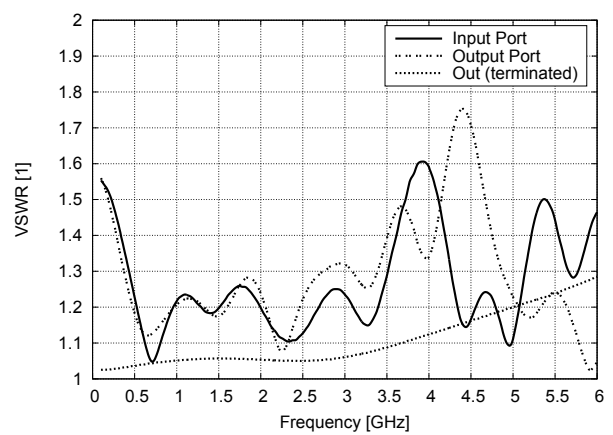


Fig. 4: VSWR for input and output ports

Semiconductor Switch HLS8-6G/UHI-TTL

MTS-No.: 26581

Views:

