

Power Divider LT2-544P-6G

MTS-No.: 25417

Description

The Power Dividers of this series are designed to work between 500 MHz and 6000 MHz. They cover for example GSM, DECT, UMTS, Bluetooth, WiMAX, Wi-Fi (2.4G/5G) and all LTE frequency bands.

These units are Wilkinson dividers and can also be used as combiners.



Technical data:

1 RF-specifications:

1.1	Divider type	LT2, 2-way		
1.2	Impedance	50 Ω		
1.3	Input power (see table) @ common port @ output ports 1, 2	20 W max. @ VSWR ≤ 2.0 : 1 1 W max. each port		
1.4	Frequency range	500 - 6000 MHz		
1.5	VSWR in @ 700 - 5850 MHz @ 500 - 6000 MHz	min.	typ.	max.
			1.15	1.35
			1.3	1.6
1.6	VSWR out @ 500 - 5750 MHz @ 5750 - 6000 MHz		1.05	1.25
			1.2	1.5
1.7	Insertion loss (+3 dB) @ 700 MHz @ 5850 MHz		0.2 dB 0.9 dB	0.3 dB 1.1 dB
1.8	IL derating / 200 MHz		0.03 dB	
1.9	Isolation @ 700 - 5950 MHz @ 500 - 6000 MHz		18 dB	23 dB
			13 dB	18 dB
1.10	Amplitude balance		0.05 dB	0.2 dB
1.10	Phase balance		0.5°	1.5°

2 Connections:

2.1	RF-in- and outputs	3x SMA female (3x N female available @ MTS-No.: 25418)
-----	--------------------	--

3 General specifications:

3.1	Operating temperature	-40 °C - +85 °C
3.2	Reference temperature of specifications	+25 °C
3.3	Dimensions (without connections) (LxWxH)	56 mm x 49 mm x 11.5 mm
3.4	Case style	Milled aluminium enclosure
3.5	Colour	SurTec650 (Chrome alloy)
3.6	Weight	70 grams

4 Delivered parts:


LT2-544P-6G
Datasheet

5 Comments:

Warranty	12 months
RoHS-compliant	Yes

6 Recommended accessories:

RF-cables
Attenuators series PAH

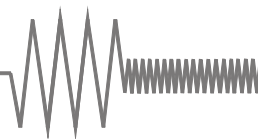

Power Divider LT2-544P-6G

MTS-No.: 25417

Typical measurements:

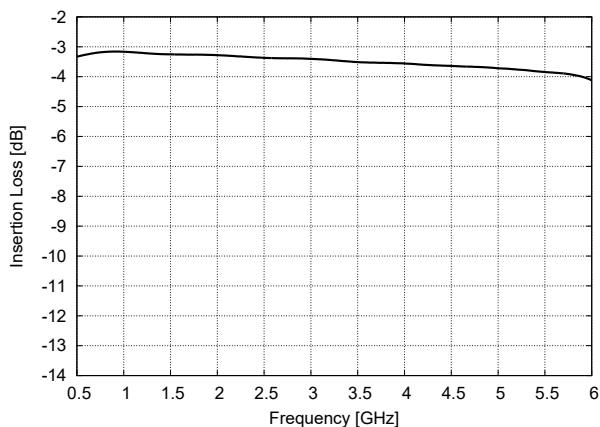


Fig. 1: Common port to output port insertion loss

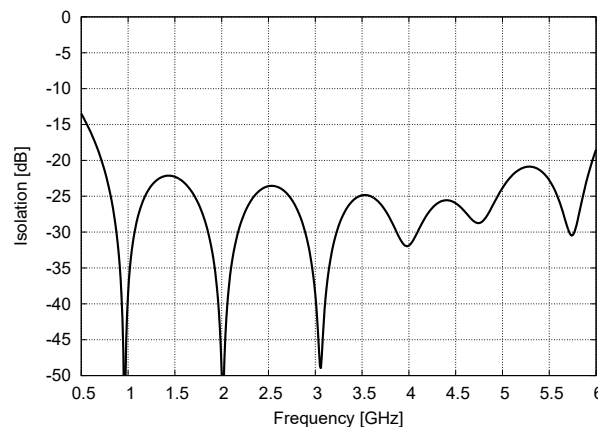


Fig. 2: Isolation between output ports

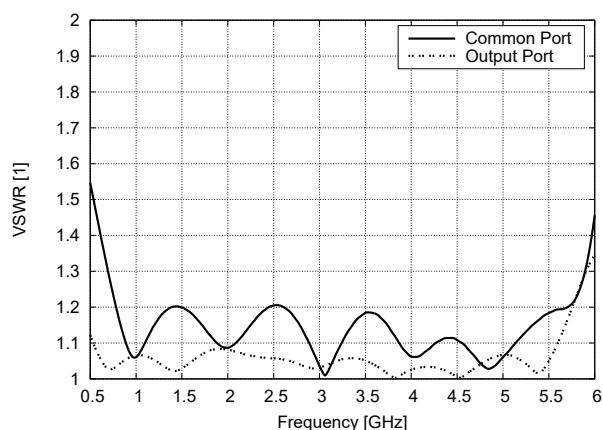


Fig. 3: VSWR for common and output ports

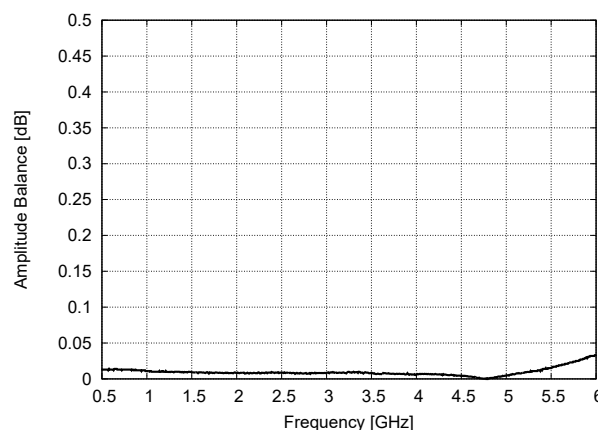


Fig. 4: Amplitude balance between output ports


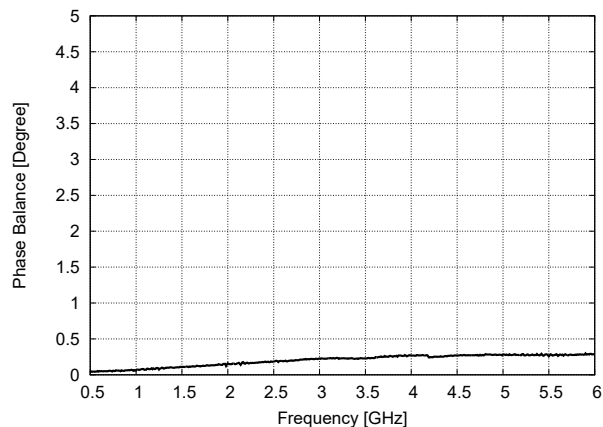


Fig. 5: Phase balance between output ports



Power Divider LT2-544P-6G

MTS-No.: 25417

Power ratings:

2-way Power Divider input ratings (common port)		
Load VSWR	In-phase (0°)	Out-of-phase (180°)
≤ 1.2 : 1	40 Watts	40 Watts
≤ 2.0 : 1	40 Watts	20 Watts
∞	20 Watts	2 Watts
2-way Power Combiner input ratings (output ports)		
Input signals	0° Phase Difference	180° Phase Difference
Coherent	2 x 20 Watts	2 x 1 Watt
Non-coherent	2 x 2 Watts	

Views:

