

Power Divider LT3-588P-4G

MTS-No.: 24915

Description

The Power Dividers of this series are designed to work between 500 MHz and 4000 MHz. They cover for example GSM, DECT, UMTS, Bluetooth and all LTE frequency bands (4G).

These units are Wilkinson dividers and can also be used as combiners.



Technical data:

1 RF-specifications:

1.1	Divider type	LT3, 3-way		
1.2	Impedance	50 Ω		
1.3	Input power	10 W max.		
	@ common port	1 W max. each port		
1.4	Frequency range	500 - 4000 MHz		
1.5	VSWR in	min.	typ.	max.
	@ 700 - 3000 MHz		1.2	1.4
	@ 3000 - 3600 MHz		1.3	1.5
	VSWR out			
	@ 700 - 3000 MHz		1.15	1.3
	@ 3000 - 3600 MHz		1.3	1.5
1.6	Insertion loss (+4.8 dB)			
	@ 3600 MHz		0.7 dB	1.0 dB
1.7	Isolation (see plot)			
	@ 700 - 3600 MHz	19 dB	25 dB	
1.8	Amplitude balance		± 0.05 dB	± 0.3 dB
1.9	Phase balance		$\pm 0.5^\circ$	$\pm 2.0^\circ$

2 Connections:

2.1	RF-in- and outputs	4x N female (4x SMA female available @ MTS-No.: 24901)
-----	--------------------	--

3 General specifications:

3.1	Operating temperature	-40 °C - +85 °C
3.2	Reference temperature of specifications	+25 °C
3.3	Dimensions (without connections)	120 mm x 40 mm x 22 mm (LxWxH)
3.4	Case style	Milled aluminium enclosure
3.5	Colour	SurTec650 (Chrome alloy)
3.6	Weight	270 grams

4 Delivered parts:


LT3-588P-4G
Datasheet

5 Comments:

Warranty	12 months
RoHS-compliant	Yes

6 Recommended accessories:

RF-cables
Attenuators series PAH



Power Divider LT3-588P-4G

MTS-No.: 24915

Typical measurements:

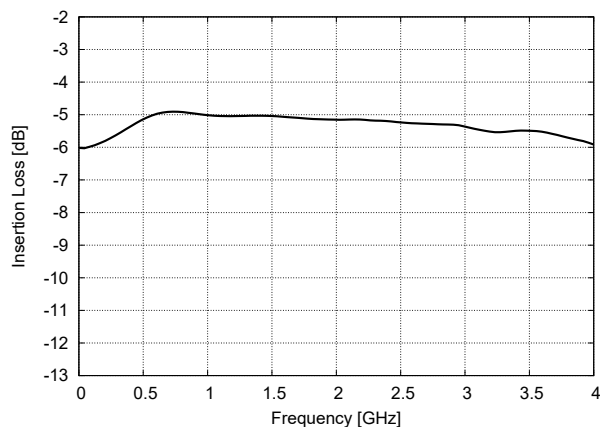


Fig. 1: Common port to output port insertion loss

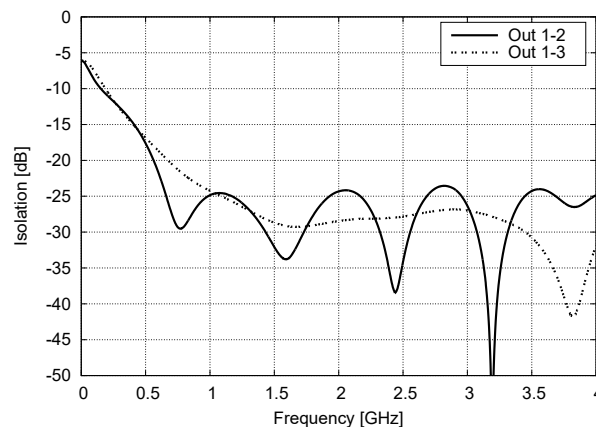


Fig. 2: Isolation between output ports

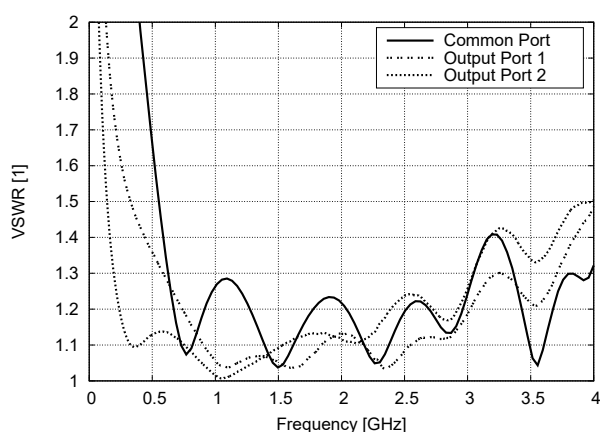


Fig. 3: VSWR for common and output ports

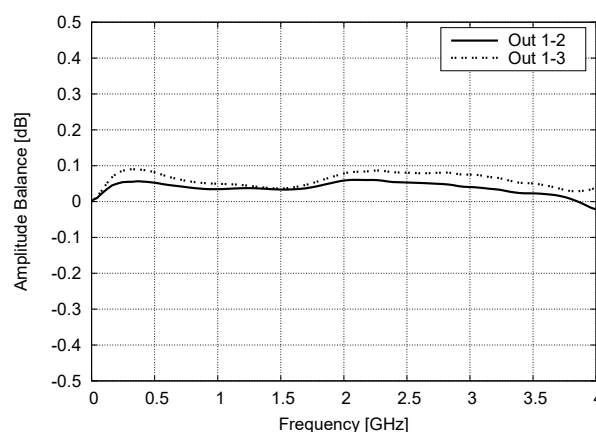


Fig. 4: Amplitude balance between output ports

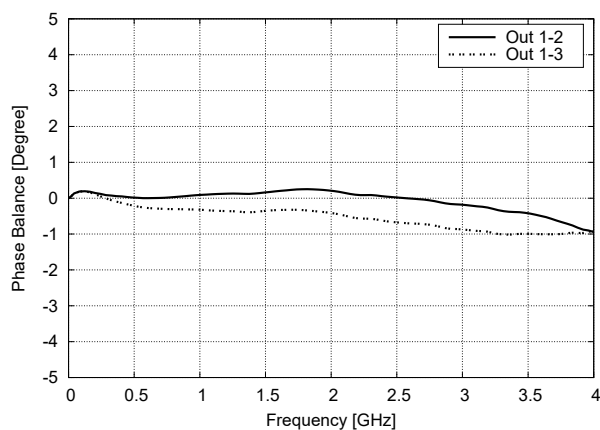


Fig. 5: Phase balance between output ports

Power Divider LT3-588P-4G

MTS-No.: 24915

Views:

