

Power Divider LT4-588P-8G

MTS-No.: 30031

Page 1 from 3

Description

The LT4-588P-8G is a ultra-wideband 4-way 0° high-power divider/combiner which provides up to 40 W power handling as a divider.

The coverage from 500 MHz to 8 GHz supports a wide range of applications including GSM, Bluetooth, Wi-Fi 7 and all LTE+ as well as 5G frequency bands.

Its unique design maintains a very low insertion loss, minimizing power dissipation and excellent signal power transmission from input to output.



Technical data:

1 RF-specifications:

1.1 Divider type	LT4, 4-way		
1.2 Impedance	50 Ω		
1.3 Input power (see table) @ common port @ output ports 1, 4	40 W max. @ VSWR $\leq$ 2.0 : 1 1 W max. each port		
1.4 Frequency range	500 - 8000 MHz		
	min.	typ.	max.
1.5 VSWR in		1.25	1.50
VSWR out			
@ 500 - 7200 MHz		1.20	1.45
@ 7200 - 8000 MHz		1.30	1.90
1.6 Insertion loss (+6 dB) @ 500 - 4000 MHz @ 4000 - 8000 MHz		0.50 dB 0.90 dB	1.00 dB 1.50 dB
1.7 IL derating / 200 MHz		0.02 dB	
1.8 Isolation (see plot) @ 700 - 7200 MHz @ 500 - 8000 MHz	19 dB 13 dB	25 dB 18 dB	
1.9 Amplitude balance @ 500 - 4000 MHz @ 4000 - 8000 MHz		0.05 dB 0.15 dB	0.15 dB 0.30 dB
1.10 Phase balance @ 500 - 4000 MHz @ 4000 - 8000 MHz		1.0° 2.0°	2.0° 4.0°

2 Connections:

2.1 RF-in- and outputs	5x N female (5x SMA female available @ MTS-No.: 30030)
------------------------	--

3 General specifications:

3.1 Operating temperature	-40 °C - +85 °C
3.2 Reference temperature of specifications	+25 °C
3.3 Dimensions (without connections)	131 mm x 90 mm x 16 mm (LxWxH)
3.4 Case style	Milled aluminium enclosure
3.5 Colour	SurTec650 (Chrome alloy)
3.6 Weight	525 grams

4 Delivered parts:

LT4-588P-8G
Datasheet

5 Comments:

Warranty	12 months
RoHS-compliant	Yes

6 Recommended accessories:

RF-cables
Attenuators series PAH

Power Divider LT4-588P-8G

MTS-No.: 30031

Page 2 from 3

Typical measurements:

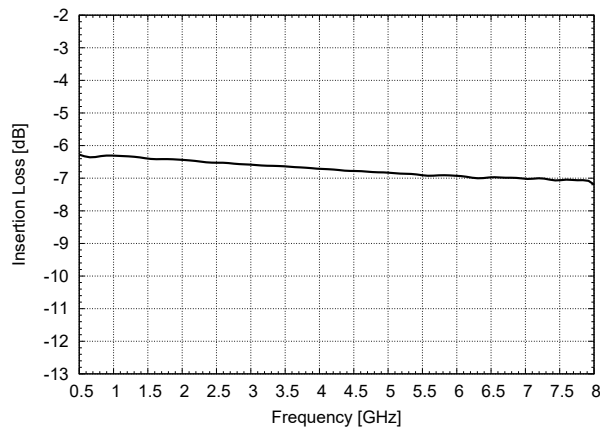


Fig. 1: Common port to output port insertion loss

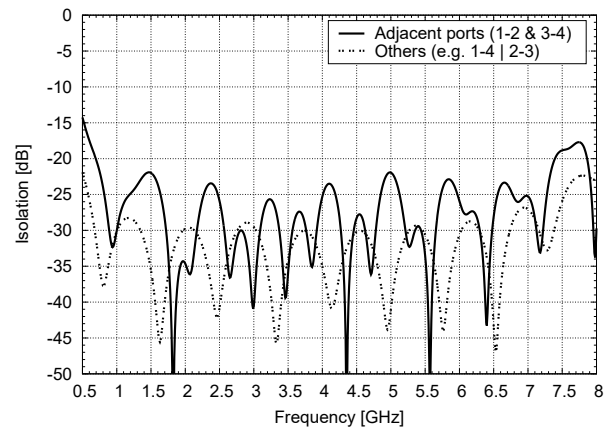


Fig. 2: Isolation between output ports

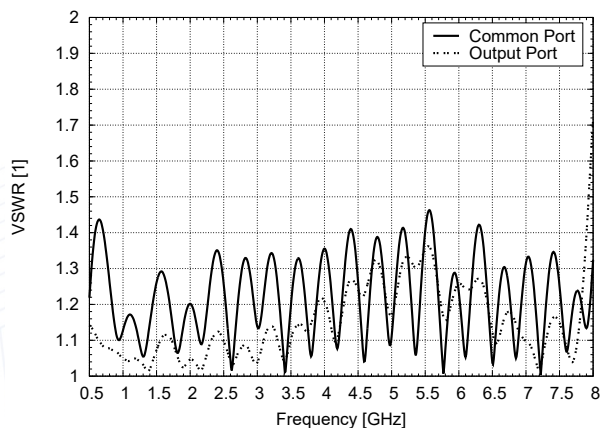


Fig. 3: VSWR for common and output ports

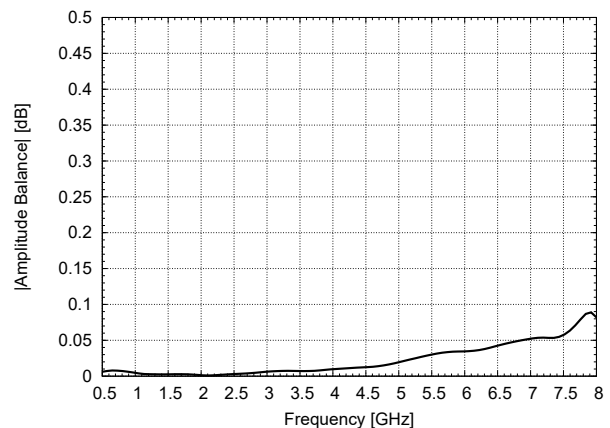


Fig. 4: Amplitude balance between output ports

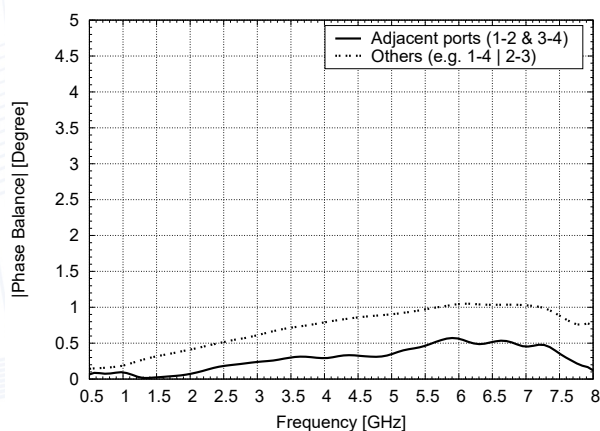


Fig. 5: Phase balance between output ports

Power Divider LT4-588P-8G


MTS-No.: 30031

Page 3 from 3

Power ratings:

4-way Power Divider input ratings (common port)		
Load VSWR	In-phase (0°)	Out-of-phase (180°)
$\leq 1.2 : 1$	40 Watts	40 Watts
$\leq 2.0 : 1$	40 Watts	40 Watts
∞	20 Watts	4 Watts
4-way Power Combiner input ratings (output ports)		
Input signals	0° Phase Difference	180° Phase Difference
Coherent	4 x 10 Watts	4 x 1 Watt
Non-coherent	4 x 2 Watts	

Views:

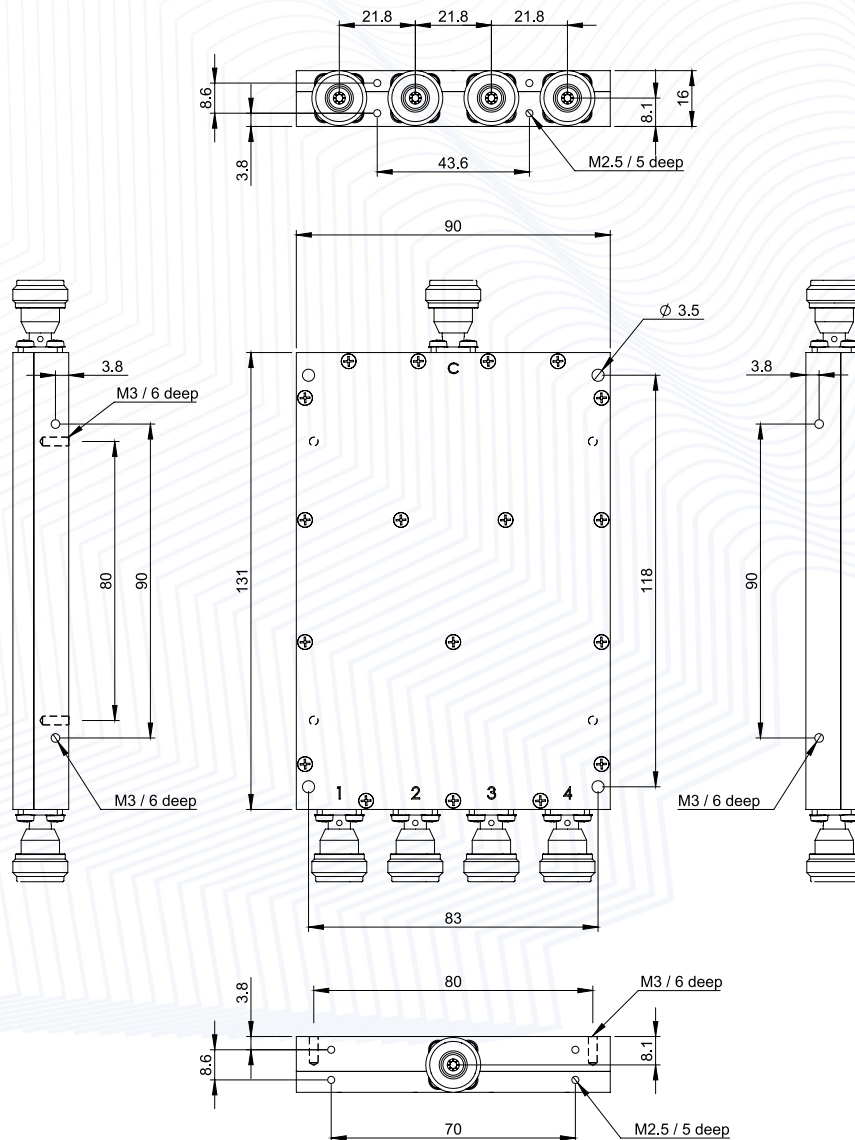

30031.SPEC / LT4-588P-8G / 2024-03-06

© MTS Systemtechnik GmbH
Technical subject to change